



COMPACT, QUIET AND EFFICIENT

For further technical information, visit our website: www.micronel.com.

U|Line Radial Blowers

U64, U97, U150

Technical data


Voltage; U [V]	3–24
Power consumption; P [W]	1–60
RPM; n [min-1]	7'000–12'000
Airflow rate; Q [l/min]	200–1'000
Static pressure; delta P [Pa]	200–3'500
Noise; Lp [dB(A)]	46–69

U51, U65, U71, U85


Technical data

Voltage; U [V]	12–24
Power consumption; P [W]	10–150
RPM; n [min-1]	25'000–50'000
Airflow rate; Q [l/min]	300–1'000
Static pressure; delta P [Pa]	1'500–15'000
Noise; Lp [dB(A)]	50–70

PQ Chart

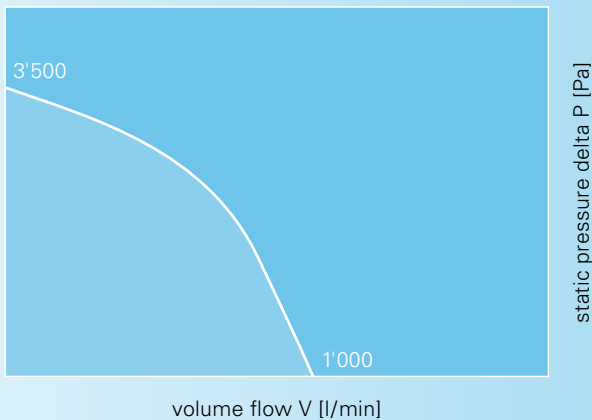

PQ Chart

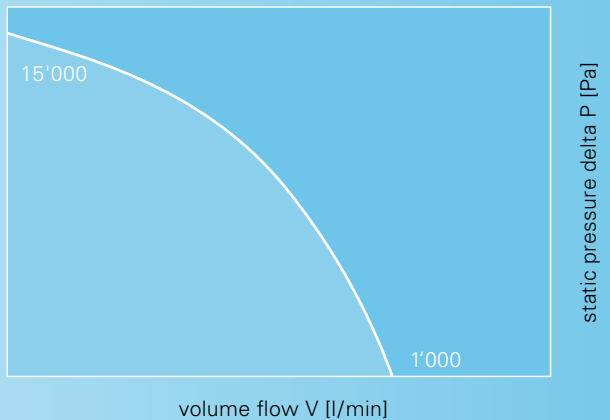

High-speed blowers with up to 50,000 rpm

U51, U65, U71, U85
Ø 50, 65, 73, 82 mm



U71, U85 ECO
Ø 73, 82 mm



U51, U65, U71, 2-STAGE
Ø 50, 65, 73 mm

