

THE ULTRA-SLIM FAN FOR A VARIETY OF USES

For further technical information, visit our website: www.micronel.com.

F | Line Fans & Blowers

F16, F25, F40

Technical data


Voltage; U [V]	5–12
Power consumption; P [W]	0.3–1
RPM; n [min-1]	4'000–10'000
Airflow rate; Q [l/min]	50–200
Static pressure; delta P [Pa]	15–50
Noise; Lp [dB(A)]	15–20

C5010, K8038, G1751


Technical data

Voltage; U [V]	5–48
Power consumption; P [W]	1–35
RPM; n [min-1]	2'000–15'000
Airflow rate; Q [l/min]	150–10'000
Static pressure; delta P [Pa]	20–350
Noise; Lp [dB(A)]	20–65

PQ Chart

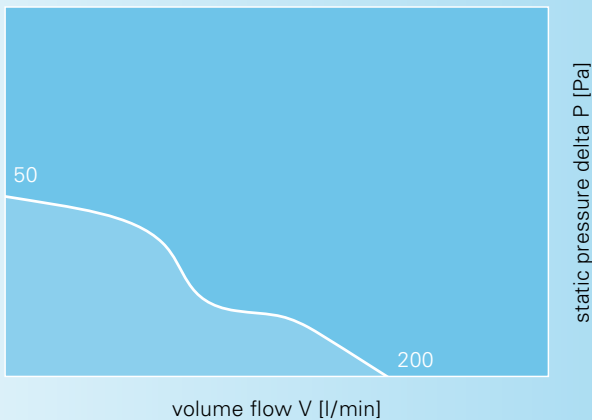

PQ Chart

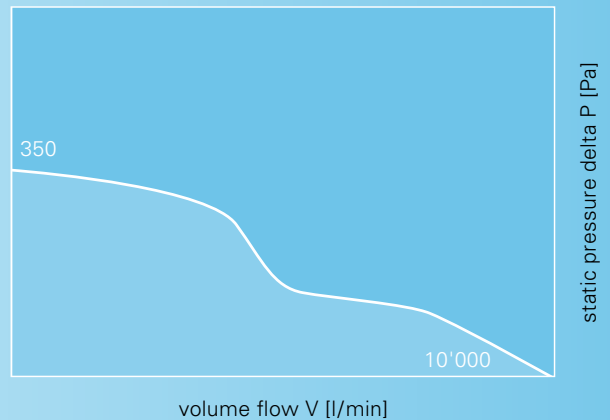

Standard series

C5010

Ø 50 mm



K8038

Ø 80 mm



G1751

Ø 172 mm

